



# William N. Lamarre Concrete Products, Inc.

## H2O UNDERGROUND WATER RETENTION UNITS

SPECIAL APPLICATION  
Drawing Not to Scale

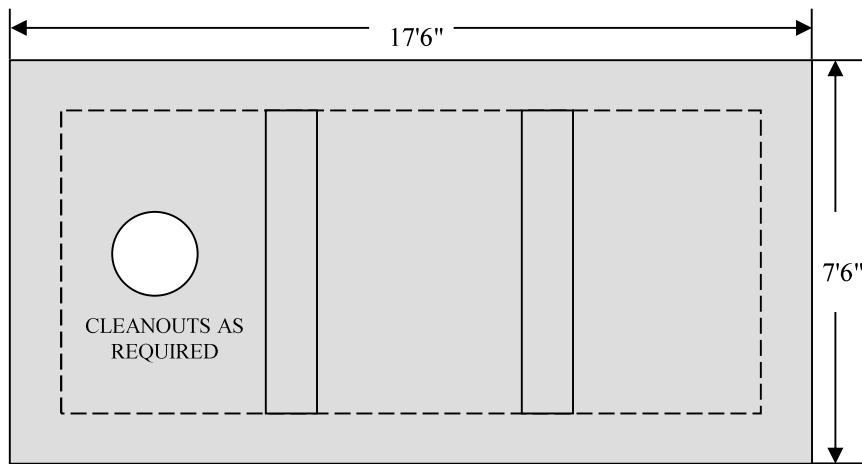

TOP VIEW-TOP  
CLEANOUTS AS REQUIRED

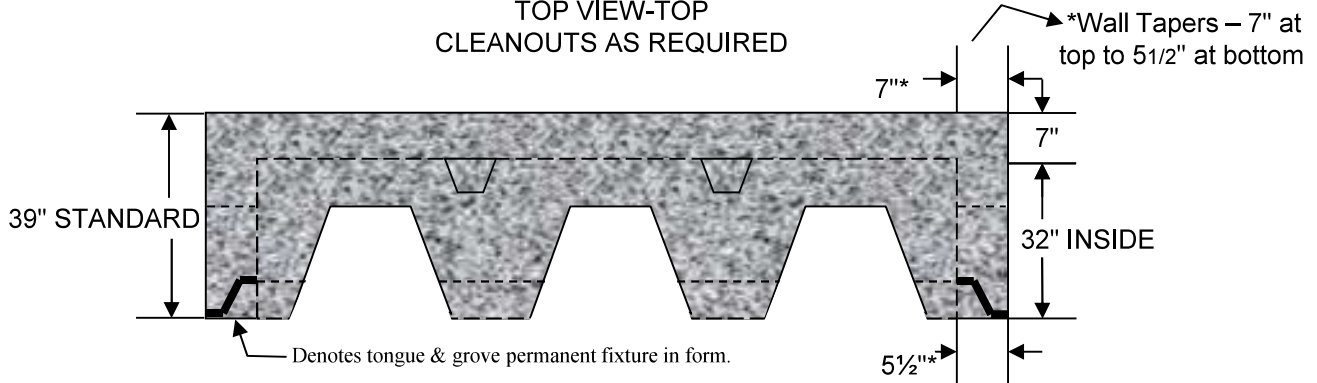


\*Wall Tapers – 7" at top to 5 1/2" at bottom

Cutouts in center units as shown.  
Outside units have solid outside walls.  
Inlet and Outlet Cores & Boots per your requirements.

17'6" x 7'6" OD  
16'6" x 6'6" ID

16.5'x6.5' x 2.66'=285.2 CU FT = 2133 gals. per unit  
17,000 CU FT / 285.2 CU FT = 59.60 units.  
60 Units Required.

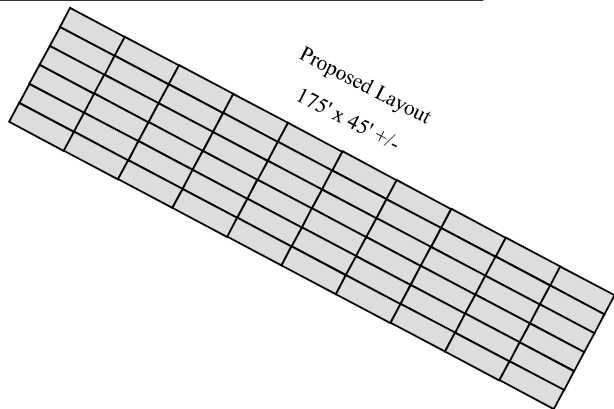

**Notes**

1. Concrete strength  $f_c$  5000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Design Loading AASHTO HS20-40
5. Access & Piping per job specs.