
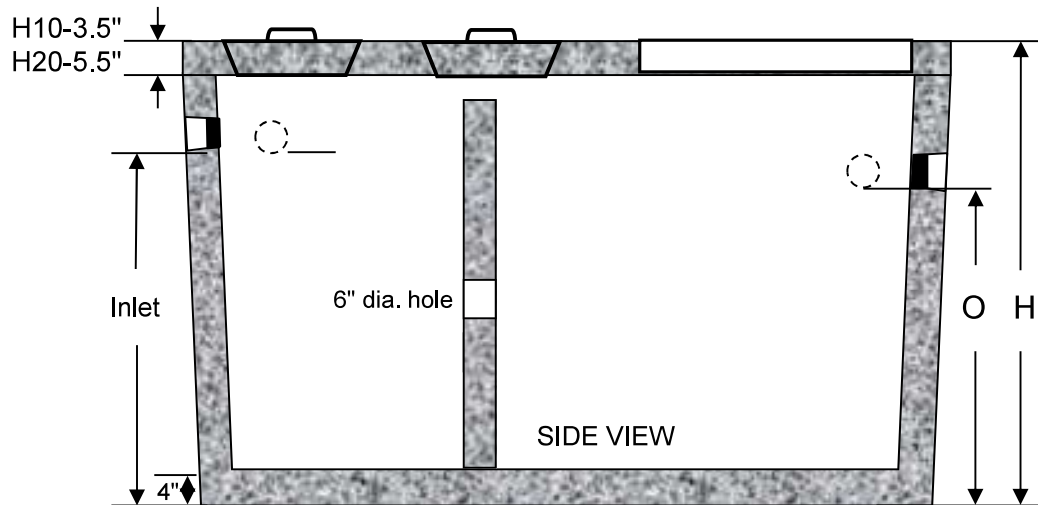


# William N. Lamarre Concrete Products, Inc.

## MONOLITHIC .5 FAST TANK

### External Mount

Drawing Not to Scale

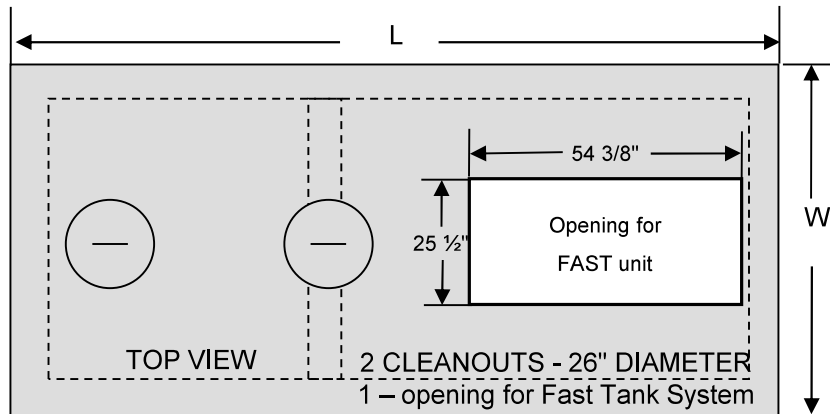

Critical Tank Dimensions				
Liquid Capacity	Inlet / Outlet	Height H10 (HD)	L x W	Excavation Size
1500	54½" / 51"	68" (70")	10'3" x 6'2½"	12' x 8'
2000	Call / Call	68" (70")	12'11½" x 6'11¼"	12' x 8'

#### Notes

1. Special purpose Mono Tank – adapted for FAST .5 System.
2. Concrete strength f'c 4000PSI@28 days. Density 150 PCF.
3. Cement, Portland Type II or III, ASTM C150-81
4. Admixtures, air & plasticizers per ASTM C233-82
5. Reinforcement per ASTM C1227-latest revision
6. Heavy-duty top loading available – add 2" to height
7. Construction joints sealed with butyl rubber
8. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks