


William N. Lamarre Concrete Products, Inc.

H2O COMMERCIAL PRECAST TANK 2-COMP (2/3-1/3)

3000 – 8000 Gallon Capacity

Drawing Not to Scale

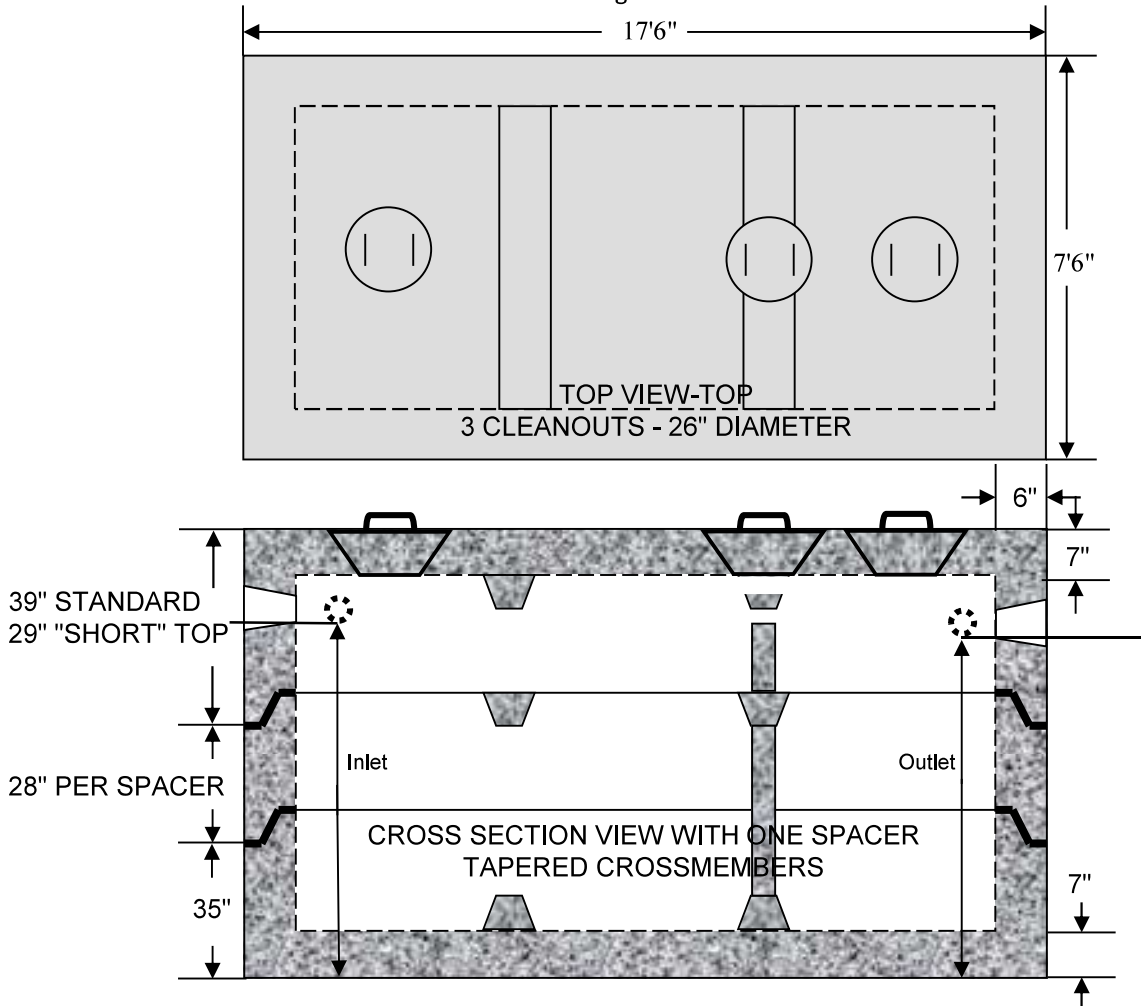

Critical Tank Dimensions				
Liquid Capacity	Inlet / Outlet	Height	Septic Capacity	Holding Capacity
3000	57" / 55"	74"	3220	4020
3500	65" / 63"	82"	3750	4555
4000	75" / 73"	92"	4555	5225
5000	85" / 82"	102"	5025	5895
6000	103" / 101"	120"	6300	7100
7000	113" / 111"	130"	7020	7825
8000	131" / 129"	148"	8175	9045

Notes

1. Also available as a 2 compartment tank. (Placement varies as needed)
2. Concrete strength f'c 5000PSI@28 days. Density 150 PCF.
3. Cement, Portland Type II or III, ASTM C150-81
4. Admixtures, air & plasticizers per ASTM C233-82
5. Reinforcement per ASTM C1227-latest revision
6. Design Loading AASHTO HS20-40
7. Construction joints sealed with butyl rubber
8. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks