


William N. Lamarre Concrete Products, Inc.


JUMBO DRYWELL – Stack Option

Available H10 and HD(Top Loading)

(Drawings Not to Scale)

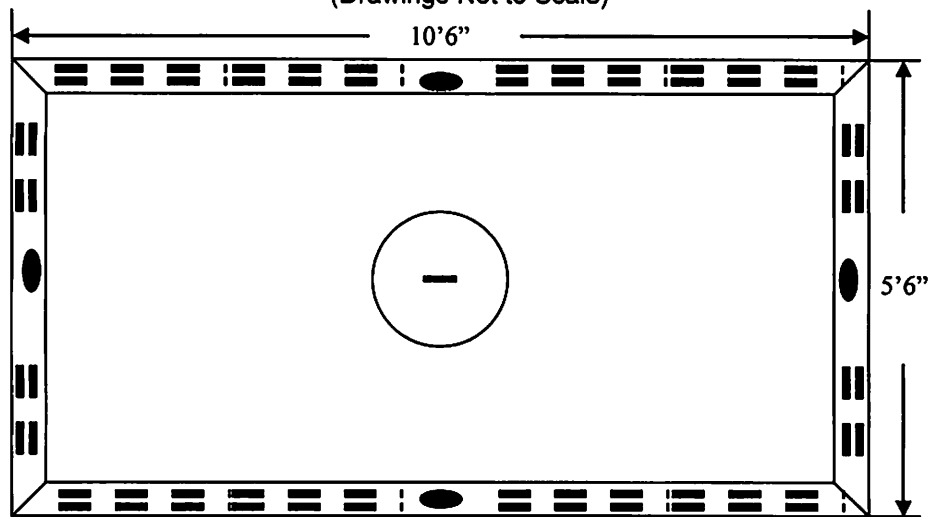

TOP VIEW-TOP
1 CLEANOUT - 24" DIAMETER

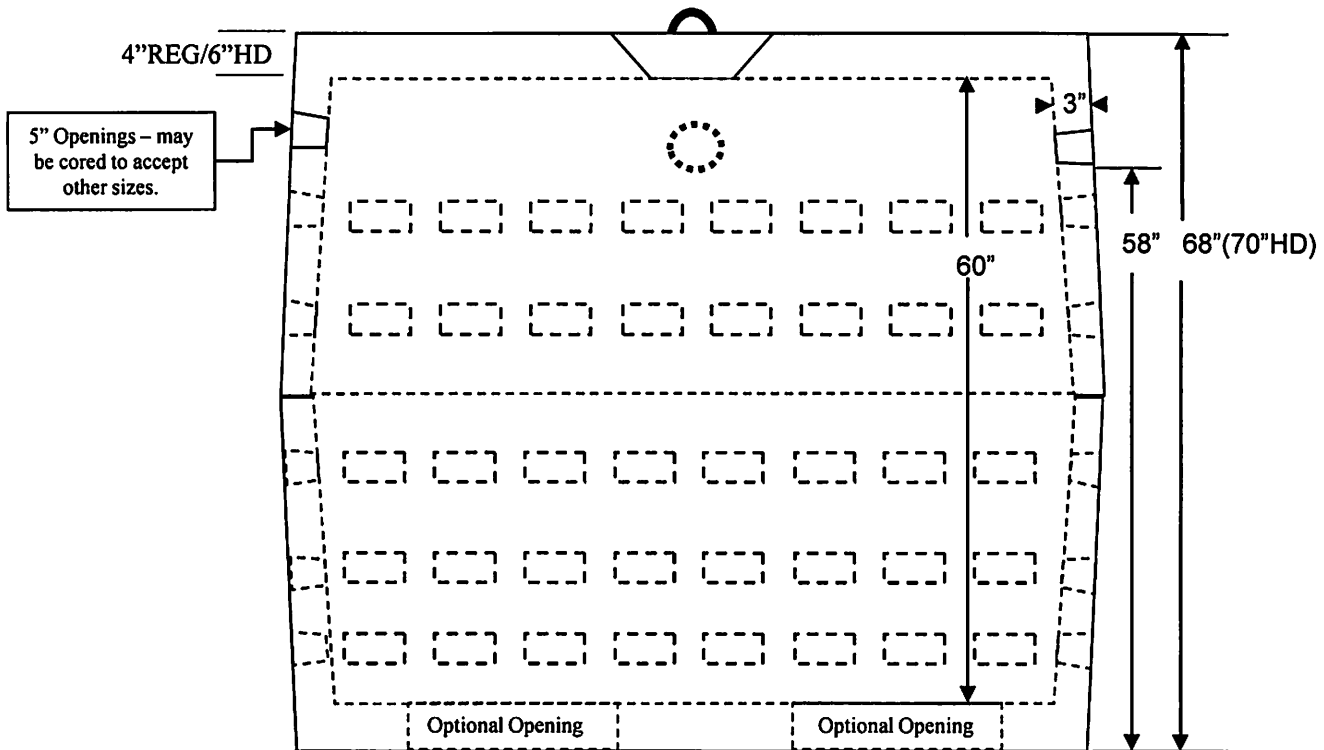

CROSS SECTION VIEW

Notes

1. Concrete strength f_c 4000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Reinforcement per ASTM C1227-latest revision
5. Heavy-duty is 2" higher due to increased top thickness - 6" TOP.

P.O. Box #333, 87 Adams Hill Rd, Greenville, NH 03048
603-878-1340 MA 800-937-3435 NH 800-878-0514 Fax: 603 878-3349